



◆ Characteristic / 特性 :

- Used to check photoelectric and proximity sensor./ 可檢測光電開關與近接開關並供應18VDC給SENSOR使用。
- Two LED indicators and two select switches for NPN or PNP./ 提供二組NPN及PNP輸入測試。
- Use DC24V to recharge the battery ./ 可使用DC24V外部電源來進行電池充電。
- Automatic power off : If operator does not make any motion or detection after power-on, it will stop automatically after 5 minutes.Auto power off timer for saving power./ 省電裝置，開機後，5分鐘未動作，將會自動關閉。
- LED indicator blinks when low power./ 當電量不足時,指示燈會閃爍。
- Power source : DC24V or 18V Rechargeable battery ./ 使用電源為外部DC24V或內部一顆18V電池。

◆ Panel description / 功能位置 : (unit:mm)

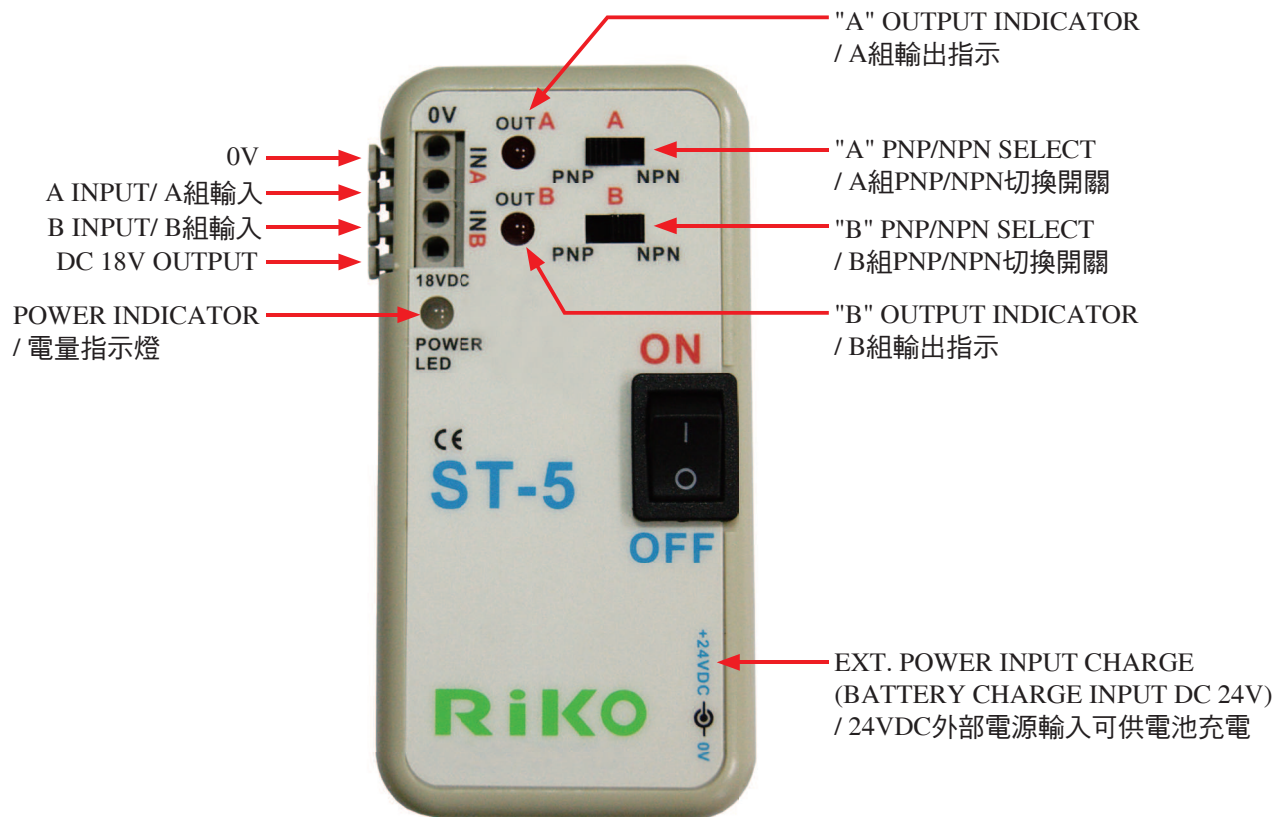

◆ Dimensions / 尺寸圖 : (unit:mm)

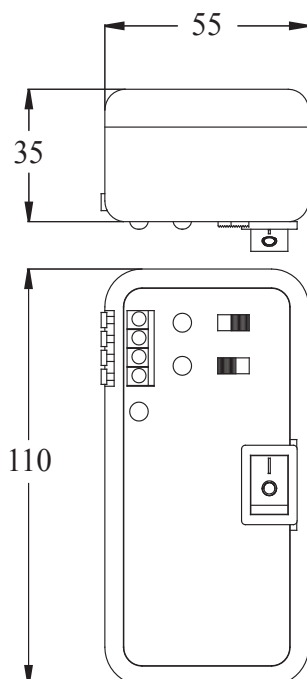

◆ BATTERY CHARGER : GS18U24-P1J (OPTION)



Series	GS18U
Model	GS18U24-P1J
Dimension	79x54x33 mm
Power output	DC 24V 0.75A

◆ BATTERY : ST-5-B01

Lithium Polymer Rechargeable Battery.



60x30mm

Others

GM48
G3Y

GC48-A
RTC-
P2400
RTC-
P482CRA

ST-1
ST-T2
R-1189D

ST-5

HTR-3A
HTR-HN
HTR-W

RKP25
RKP42

ACC.